

SKYGUARD WALL



PRISMATECH

INCANDESCENT

1-75W

APPLICATION

Suitable for pathways, driveways, gate entrances, campuses, courtyards, hospitals, commercial and institutional environments.

The light distribution complies with the IESNA Full Cut-Off Classification and is eligible for all "Dark Sky" applications and local light trespass ordinances.

LUMINAIRE CONSTRUCTION

The Skyguard housing and trim are made of copper free die-cast aluminum, the wall bracket is extruded aluminum, all painted with a long lasting powder coat finish.

GLASS DIFFUSER

Clear tempered soda lime glass diffuser, 0,11" thick.

GASKET

Gasket between trim and glass and one-piece molded EPDM gasket between trim and housing seals out water, dust and insects.

ELECTRICAL

Porcelain lampholders are medium base with nickel-plated screwshell, rated for 600 V 660W.

LAMPS

Incandescent 75 W medium base. Lamps supplied by others.

FINISH

Iron Gray and Matte Metallic Gray are standard.

The standard finish includes a ten step process of cleaning pretreatment and painting. Thermally cured (TGIC) polyester powder coat paint is electrostatically applied to each fixture. This process ensures the finish will last for years without fading, chipping or cracking. Conforms to ASTM D 1730 and MIL - C - 5541.

LISTINGS

UL and cUL listed, Wet location, IP55.

ACCESSORIES

Further accessories include a 98,2" post accepting up three Skyguard Wall luminaires.



1-75W




PRODUCT CODE

PROJECT

TYPE

LUMINAIRE	LAMP	VOLTAGE	FINISH
074444	1-75W E26	120	Matte Metallic Gray
074446	1-75W E26	120	Iron Gray



Prisma North America, Inc.
 300 Petty Road, Suite C - Lawrenceville, GA 30043
 Voice 770.822.2115 - Fax 770.822.9925
 Email: info@prismalighting.com



SKYGUARD WALL






PRISMATECH

INCANDESCENT

1-75W

1-75W

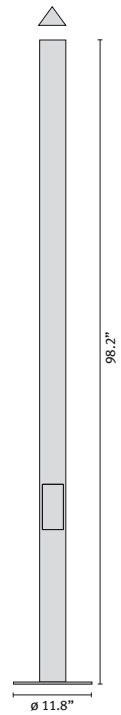

CODE	LUMINAIRE	FINISH
505	Post ø8.2"	Matte Metallic Gray
506	Post ø8.2"	Iron Gray
741	Template post	

