

PROGRILL



PRISMA LANDSCAPE

QUARTZ HALOGEN

1-75W

APPLICATION

Square recessed wall mounted luminaire, suitable for lowlevel pathway lighting and step light applications.

ROUGH-IN HOUSING

Self extinguishing (V2 rated), injection molded polypropylene housing. Includes a die-cast anodized aluminum, 24 cu. in. integral junction box, secured and sealed against water intrusion to the bottom of the rough-in with two 1/2" NPT openings for feed through wiring. Provided with a disposable protective cover for masonry works.

LUMINAIRE HOUSING

Die-cast corrosion resistant aluminum housing. Bright finish.

LOUVER

Precision die cast, copper free aluminum, 0.1" thick, available in metallic gray or black anodized finish. Conforms to ASTM A413.2. It is secured in place by four stainless steel flat head screws.

DIFFUSER RETAINING TRIM

Die-cast corrosion resistant aluminum, dark gray satin finish.

DIFFUSER

Pressed soda lime glass diffuser, resistant to thermal shocks, transparent finish. The diffuser is held in place by the retaining

trim, which is secured by eight stainless steel hex cap screws.

GASKET

One-piece molded silicone gasket seals out water and dust.

ELECTRICAL GEAR AND OPTICAL SYSTEM SUPPORT

Semi-specular anodized aluminum reflector. Steel reflector support. Grounded internally. Stainless steel hardware.

ELECTRICAL

125V, 75W rated porcelain socket secured to bracket by screws.

LAMPS

Quartz Halogen 75W T4, supplied by others

WIRING

The luminaire is factory wired with 24" of #18-3 AWG SJEOW cord. The cord is sufficient to allow the luminaire housing to be removed from the rough-in housing for inspection, cleaning or relamping. The cord ends are factory sealed with resin compound to the luminaires housing and to the junction box cover to create a siphon barrier. The cast aluminum junction box cover includes an O-ring gasket to ensure water tightness.

LISTINGS

UL and cUL listed for wet location, IP65. Suitable for Concrete wall

mount applications
Rough-in Housing to be ordered separately.



1-75W




PRODUCT CODE

PROJECT

TYPE

LUMINAIRE	LAMP	VOLTAGE	FINISH
073615	1-75 W E11	120	White
073616	1-75 W E11	120	Black
073617	1-75 W E11	120	Metallic Gray

ROUGH-IN HOUSING	
9372	ProGrill

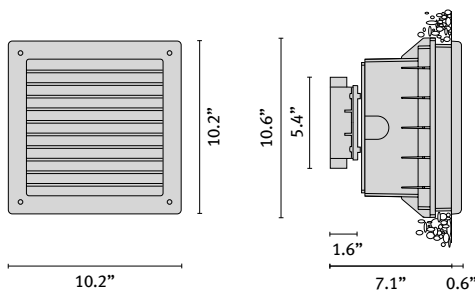

Prisma North America, Inc.
300 Petty Road, Suite C - Lawrenceville, GA 30043
Voice 770.822.2115 - Fax 770.822.9925
Email: info@prismalighting.com



PROGRILL

QUARTZ HALOGEN



1-75W

PRISMLANDSCAPE

